


NMIX-0020 F68HC11 CPU+LCD+KEYPAD

The NMIX-0020 is the F68HC11-based CPU board for the NMI "100 Squared"™ board series.


FEATURES

- F68HC11™ CPU
- Max-FORTH™ built-in programming language
- 231 predefined words in the language
- 3 parallel ports
- 1 Asynchronous Serial Ch. RS-232, 422, or 485
- 1 Synchronous Serial Channel, TTL
- 8-channel, 8-bit A/D
- 8-bit counter
- 16-bit timer
- 3 input captures
- 5 output compares
- 1/2K EEPROM
- 8K RAM
- 64K address space
- Intelligent LCD interface
- 4x5 Keypad interface
- Three 28-pin JEDEC memory sockets
- Flexible address decoding, socket assignments
- On-board Power Supply circuits: 7-18VAC input
- Battery backup circuits for memory
- 34-pin JEDSTACK™
Vertical Stacking Connector (VSC)

The NMIX-0020 is a complete system, ready to develop, or run, dedicated applications. Simply plug in the supplied wall transformer, attach a host RS-232 port, and begin programming. Then, the user program can be added to its internal EEPROM, or its battery backed RAM, or by a user-supplied ROM/EPROM/EEPROM.

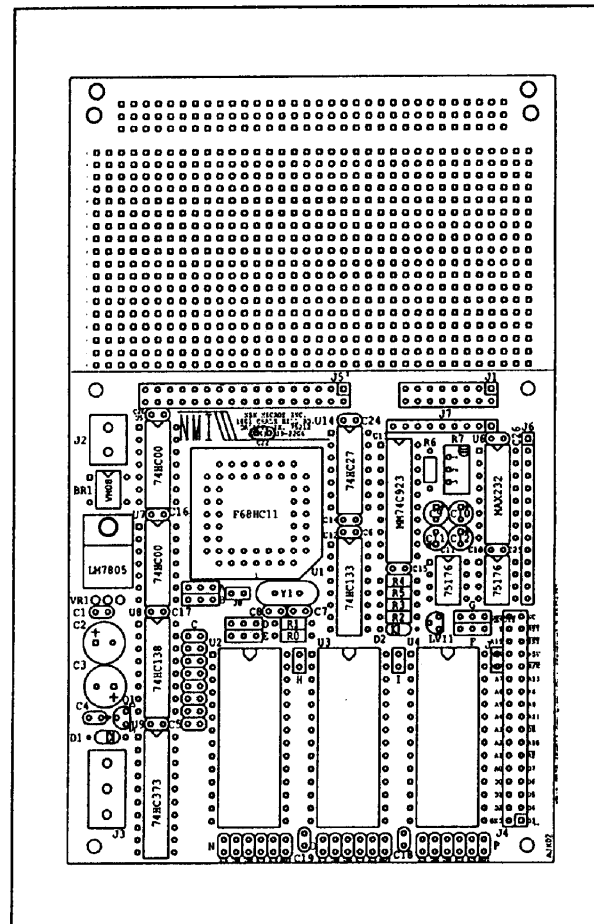


Actual size 100x160mm (~4x6")

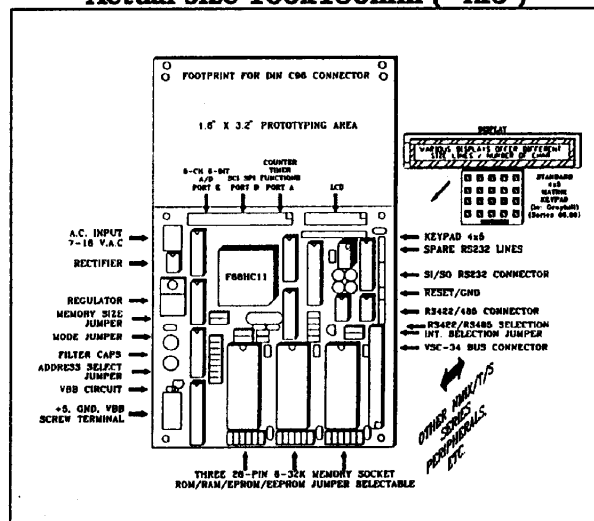


Application

NMIX-0020 F68HC11 CPU CARD "100 Squared"

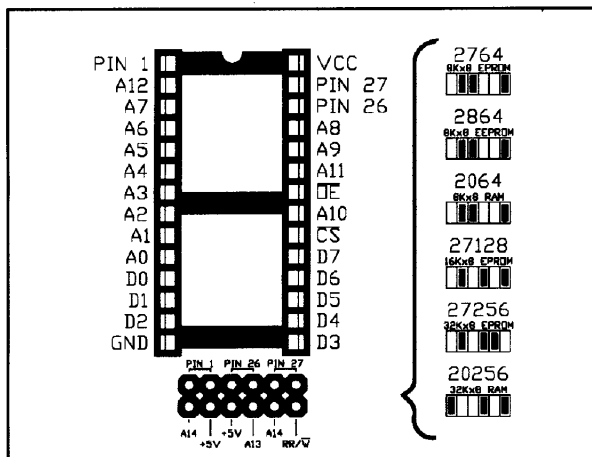

The "100 Squared"™ were named for their size, with 100x100mm of active component area, on a 100x160mm Eurocard format. The system is compatible with the New Micros NMIX, NMIT and NMIS series peripherals. The VSC's have the same pinouts on all versions. The 28-pin JEDEC memory sockets accept various memory devices. Refer to the figure at the left.


Smart terminals, or personal computers with communications packages, can download source code to the NMIX-0020 via RS-232 ports. Interactive code development on the target system gives fast and efficient debugging. The built-in language gives machine level access.

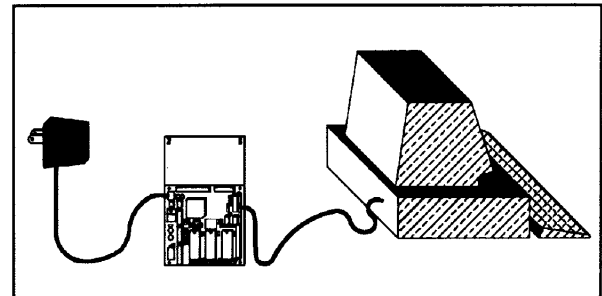

Development Configuration

The NMIX-0020 makes a very cost effective solution as target systems with LCD and Keypad interfaces, particularly when small size, CMOS low power, and ease of development are required. Few single board computer offers so many features in such a small space. High Level Language support offers resident FORTH and, optionally, BASIC and Assembly Language. FORTH and C cross compilers and cross assemblers are also available.


28-Pin JEDEC Memory Sockets

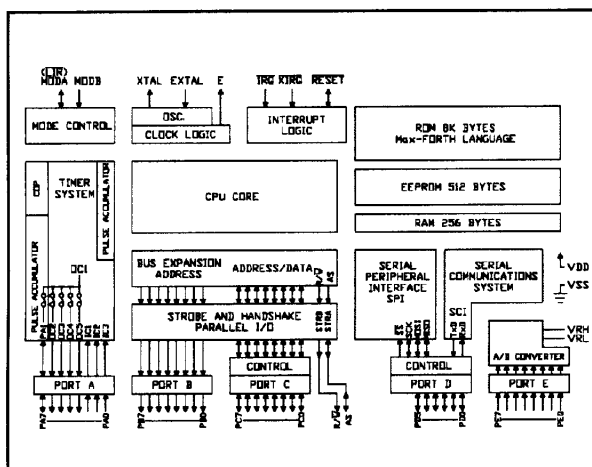

F68HC11 CPU Block Diagram

WORLD HEADQUARTERS WORLDWIDE REPRESENTATIVES

AMERICA (N, C & S)	CENTRAL EUROPE	SOUTHERN EUROPE	SCANDINAVIA	ASIA	RUSSIA
NEW MICROS, INC. Sales Department 1601 Chalk Hill Road Dallas, TX 75212, USA Phone: (214) 339-2204 Fax: (214) 339-1585 G3, G2, FMG1 User Bulletin Board: (214) 339-2321 24/12, N, 8, 1	MS Microscan Vertriebs GmbH Ueberseering 23 2000 Hamburg 60 GERMANY Phone: 0 40 / 6 32 32 14 Fax: 0 40 / 6 32 37 10	DEMEL G. Demel Handelsges. m.b.H. Hoffmeistergasse 8-10/1/4, A-1120 Vienna, AUSTRIA Phone: (0043) 0222 813 2507-0 Fax: (0043) 0222 85 95 93 Telex: 75311851	FIELD OY ELECTRONIIKKA RYHMA P O Box 131 SF 00601 Helsinki, FINLAND Phone: 358 0757 1011 Fax: 358 079 8853 Telex: 12-2022 FIELD SF	CIBI TRADING INT'L 20 Malimitman Street Teacher's Village, Diliman Quezon City, PHILIPPINES Phone: (632) 922-2988 Fax: (632) 921-8027	TECHNOFORTH 59, Bolshoi Pr., P.S., Leningrad, 197101, USSR Phone: (812) 233-86-21 (812) 233-34-10 Fax: (812) 233-86-21

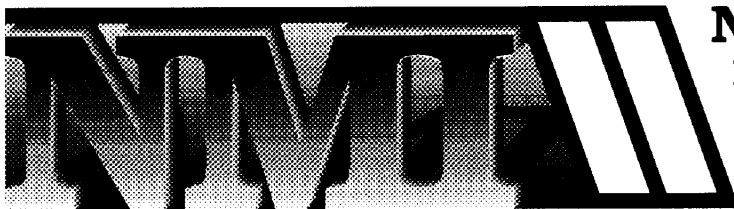

NEW MICROS, INC.
 1601 Chalk Hill Road
 Dallas, Texas 75212
 Tel: (214)-339-2204